
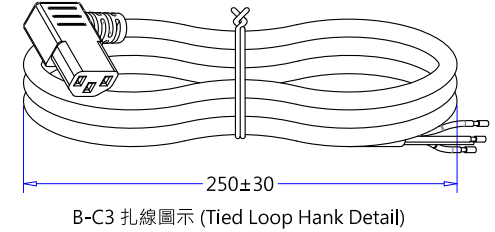
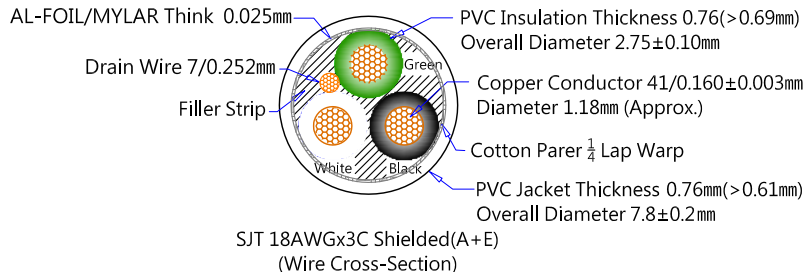
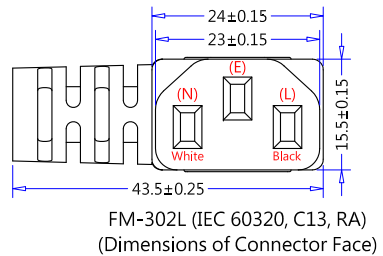


插頭部件 (Plug Component)			頭部剥皮尺寸 (Dimensions)			線材規格 (Wire Styles)		尾部剥皮尺寸 (Dimensions)			端子規格 (Terminal Style)	
顏色(Color)	零件描述(Component)	Qty.	內剥(Stripped)	外剥(ROJ)	顏色(Color)	SJT 18AWGx3C (Shielded, A+E) 105°C 黑色 (Black) Length : 3000±50 (118"±2")	外剥(ROJ)	內剥(Stripped)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)	
35P 黑色 (Black)	FM-302L (IEC 60320, C13)	1	6 <sup>+1</sup> <sub>-0</sub>	18 ± 2	黑/Black(L)		50.8±5	6.35±3	黑/Black(L)	絕緣依尺寸剝除, 留膠於線上 (Strip and Retain Outside Insulated)		
銅本色 (Brass-Natural)	2.0*4.0 方管端子(GEM 98752A-0) (2.0*4.0 Receptacle Terminal)	3	6 <sup>+1</sup> <sub>-0</sub>	18 ± 2	白/White(N)		50.8±5	6.35±3	白/White(N)	絕緣依尺寸剝除, 留膠於線上 (Strip and Retain Outside Insulated)		
米白色 (Off-White)	GA005-5 品字母插兩件式內模 (Computer 2x4 Serial Housing)	1	6 <sup>+1</sup> <sub>-0</sub>	18 ± 2	綠/Green(E)	50.8±5	6.35±3	綠/Green(E)	絕緣依尺寸剝除, 留膠於線上 (Strip and Retain Outside Insulated)			

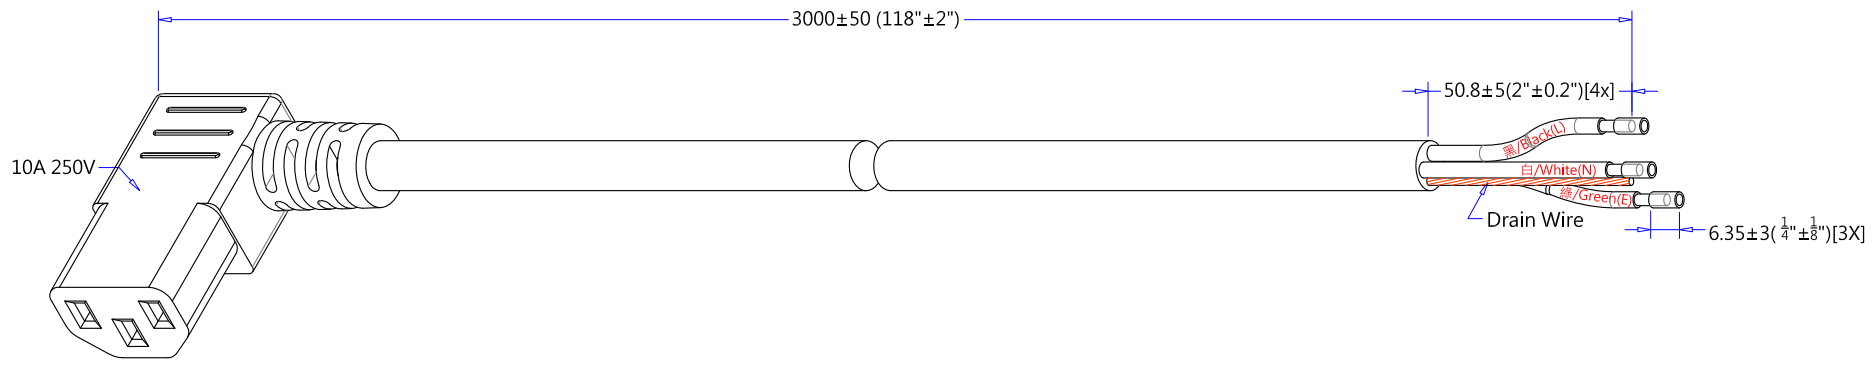

REV	DATE	REVISE CONTENT
A	08/30-2012	The first edition is issued and drawing.
F		

- NOTE:**
- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
  - Insulation Resistance Test : DC 500/min>100 meg-ohm.
  - Continuity & Polarization Test : No short circuit, break circuit, displacement.
  - Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
  - Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
  - All material according to Non-toxic standard.(Material must be RoHS compliant.)
  - "FMC" logo maybe present on C13.

線材印字 (Wire Printed)	充實, 油墨印字 (Un-Fillers, Printing Ink)			<b>CnC Tech, LLC</b> Industrial Cable and Connector Technology				
包裝方式 (Packing)		DRAWN <i>Chu8.</i>						
Tied Hank	See Hank Detail		DATE 08/30-2012		CUSTOMER	CnC		
Carton Size	480 x 320 x 250				P/N No.	800-1803-2-SJT0-BL-00300		
Pack Number	80pcs/ <small>UL Laster Labels</small>		TYPE IEC 60320, C13 RA to ROJ (S&R) Power Supply Cord		MATERIAL	PVC	UNIT	mm
Carton Print	See Purchase Order				DRAWING NO.	098MM1001	REV	A

業務校閱：  
品質校閱：