


Pin	Description	Segment
1	Top electrode	
2	Field	1
3		2
4		3
5		4
6		5
7		6

8-16
blank


Connector-
Tyco
5-1734592-6

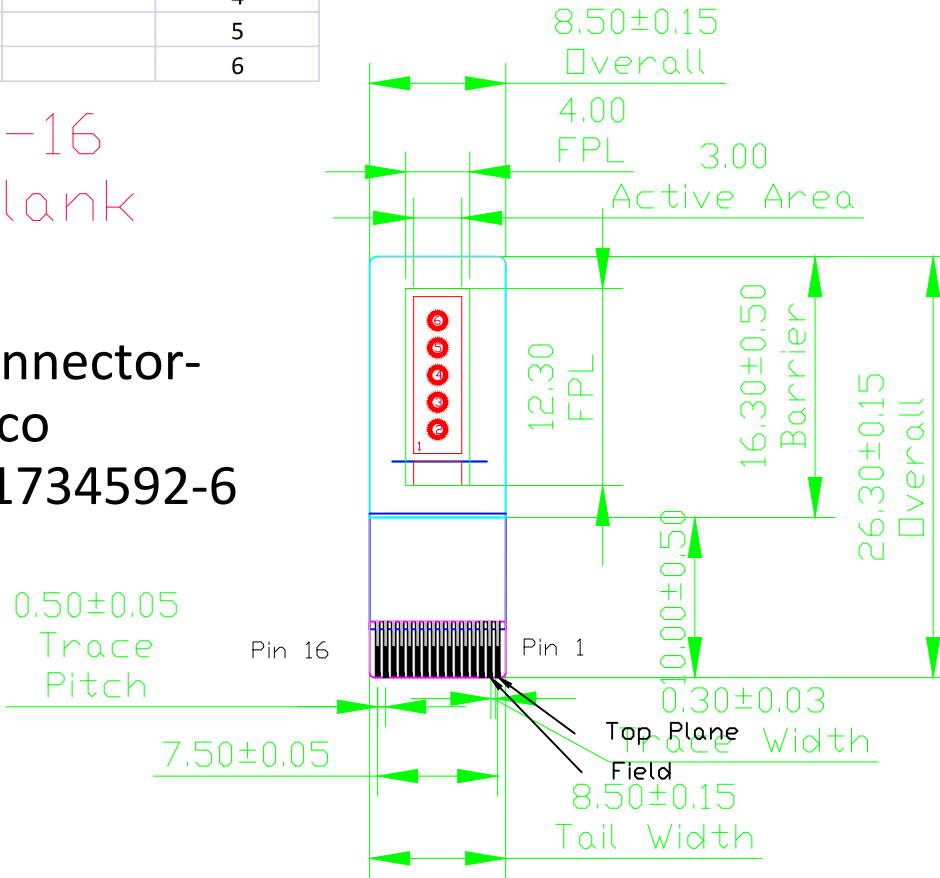

REV.	DESCRIPTION	DESIGN	DATE
01	INITIAL RELEASE		
02	Change to SDC2A		

SDC 2 (100UM THICK PTF BACKPLANE) MATERIALS LIST				
ITEM	LAYER COLOR	DESCRIPTION	MATERIAL	THICKNESS (μm)
1		BACKPLANE	MYLAR PET	100
2		ELECTRODE-FRONT	CARBON	12.50
3		ELECTRODE-REAR 1	SILVER	12.50
4		ELECTRODE-REAR 2	CARBON	12.50
5		DIELECTRIC		35
6		FRONT BARRIER	0281-1483	175
7		REAR BARRIER	0281-1484	113
8		FPL	0701-6500001	175
9		STIFFENER	MYLAR PET	140
10		STIFFENER ADHESIVE	PSA	50

Note:
1. SDC should be built in accordance with the MFG Spec.
2. Critical Dimensions Should Be Denoted with Min-Max Tolerances.

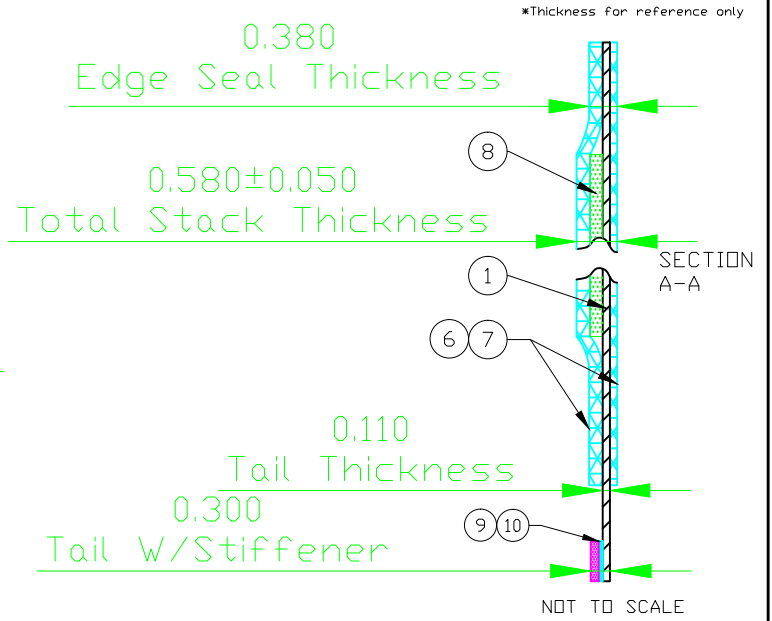

MATERIAL	HEAT & SURFACE TREATMENT	E Ink Holdings Inc.		
APPROVE	JL/KK	SCALE	UNIT	PROJECTION METHOD
CHECK	JL/SD/KK	1/1	mm	
DESIGN	S ONell	Part Number	SCD722002	DWG. NO. 345-1515
				REV. SHEET 02 1/1