

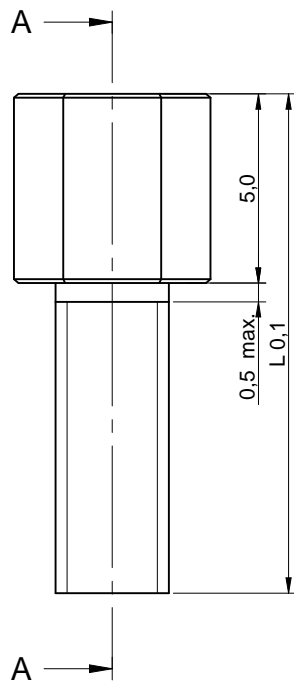
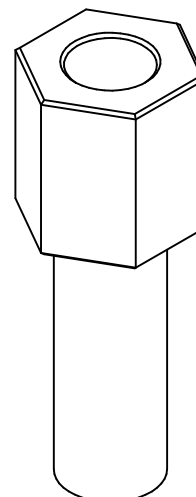


Order Code	L (mm)	Internal Thread (Ti)	External Thread (To)	Wrench Size (SW)
94510030	10.0	M3	UNC 4/40	4.5
94510003	10.0	UNC 4/40	M3	4.5
94510000	10.0	UNC 4/40	UNC 4/40	4.5
94511030	11.0	M3	UNC 4/40	4.5
94511003	11.0	UNC 4/40	M3	4.5
94511000	11.0	UNC 4/40	UNC 4/40	4.5
94513233	13.2	M3	M3	4.5
94513230	13.2	M3	UNC 4/40	4.5
94513203	13.2	UNC 4/40	M3	4.5
94513200	13.2	UNC 4/40	UNC 4/40	4.5
94518233	18.2	M3	M3	4.5
94518203	18.2	UNC 4/40	M3	4.5
94518200	18.2	UNC 4/40	UNC 4/40	4.5



sectional drawing A-A

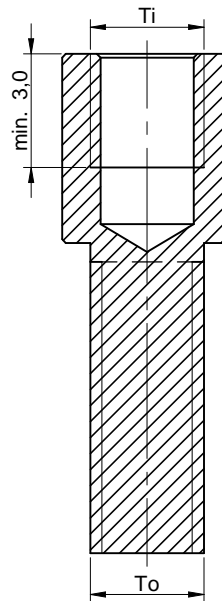

Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions

Max-Eyth-Str. 1
74638 Waldenburg
Germany
Tel. +49 79 42 945 - 0

www.we-online.com
eiSos@we-online.com

CREATED
D. Fandrey

CHECKED
S. Klingler

PROJECTION METHOD  SCALE 5:1

DESCRIPTION
**AsHex
Hexagonal Lock Screw**

MATERIAL Steel, tin-plated
GENERAL TOLERANCE DIN ISO 2768 T1m

ORDER CODE
945xxxxx

WEIGHT STATUS
Released

REV DATE
1.0 2014-12-01

PAGE
DE 1 / 1